


# QWIK-PURE® Product Selector Chart

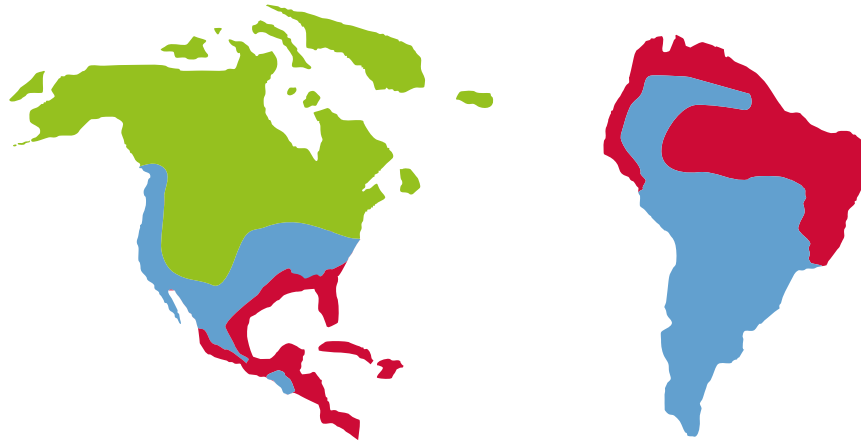

FILTER CARTRIDGE LIFE CYCLE*	
1 Shift	10-14 months
2 Shifts	8-12 months
3 Shifts	5-9 months

CLIMATE ZONE	YEARLY AVERAGE	CORRECTION FACTOR
COOL / MILD <span style="color: green;">■</span>	66% RH 45°F	1.00
MEDIUM / ARID <span style="color: blue;">■</span>	67% RH 55°F	.90
HOT / TROPICAL <span style="color: red;">■</span>	72% RH 75°F	.80

\*Ranges are approximate

COMPRESSOR HP	COMPRESSOR SCFM	PISTON COMPRESSOR		ROTARY SCREW COMPRESSOR		
		MINERAL OILS	SYNTHETIC OILS	MINERAL OILS	PAO/DIESTER OILS	POLYGLYCOL OILS
10	45	25	25	25	25	25
15	60	25	25	25	25	25
20	90	25	50	25	25	50
25	113	50	50	25	50	50
35	158	50	100	50	50	100
40	180	50	100	50	100	100
50	225	100	100	50	100	100
60	270	100	200	100	100	200
75	338	100	200	100	100	200
100	450	200	200	100	200	200
110	495	200	350	200	200	350
130	585	200	350	200	200	350
175	788	350	-	200	350	350
200	900	350	-	200	350	2 x 200
210	945	350	-	350	350	2 x 350
250	1125	350	-	350	2 x 200	2 x 350
270	1215	-	-	350	2 x 200	2 x 350
350	1575	-	-	350	2 x 350	2 x 350
400	1800	-	-	2 x 200	2 x 350	3 x 350
500	2250	-	-	2 x 350	2 x 350	3 x 350
600	2700	-	-	2 x 350	3 x 350	4 x 350
700	3150	-	-	2 x 350	3 x 350	4 x 350
800	3600	-	-	3 x 350	4 x 350	4 x 350
1000	4500	-	-	3 x 350	4 x 350	-
1300	5850	-	-	4 x 350	4 x 350	-
1600	7200	-	-	4 x 350	-	-

**IMPORTANT:**

The application, your regional location, climate zone, oil type and oil additives, compressor type, condensate volume changes throughout the day and the seasons, tendency of emulsification, and many other specifics may have a significant impact on the sizing of an oil water separator, and the lifetime of the oil water separator cartridge. The sizing correction factors and lifetime of the cartridge are approximate values only.

Please consult your BEKO certified distributor for details and sizing assistance.